




WICK® 100-4M



ULTRA LIGHTWEIGHT, MULTI-POSITION HIGH PERFORMANCE FIRE PUMP

- The WICK® 100-4M is powered by a reliable **multi-position 4 stroke** Honda GX50 engine. Ideal for operating at any angle and for backpack carrying.
- Comes mounted on a backboard style carrying base with cutout handle. Carrying straps optional
- Integral fuel tank
- Unique clutch feature for easy starting and water conservation
- The pump is a detachable, single-stage foam-compatible design for easy maintenance
- Available with a vertical mount discharge and also available with a base mounted hand primer
- Meets the emission standards of US EPA/CARB regulations

Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

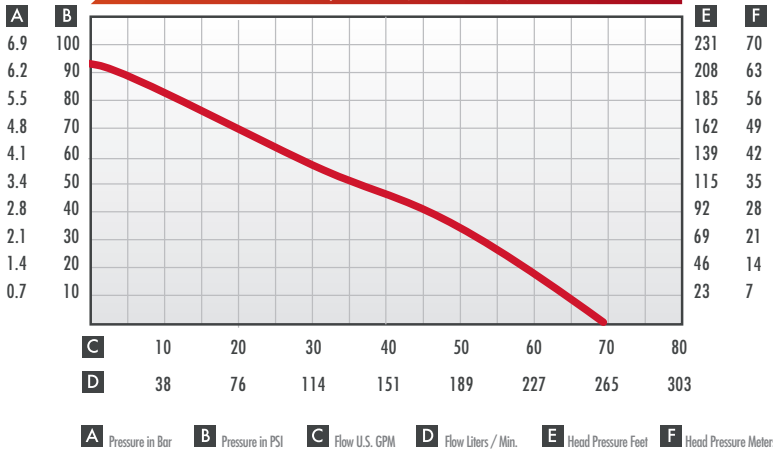

WEIGHT & DIMENSIONS

Length	14.0"	36 cm
Width	11.0"	28 cm
Height	11.75"	30 cm
Weight	17.5 lbs	7.9 kg
Suction	1.5" NPSH	38 mm
Discharge	1.5" NPSH	38 mm

ENGINE

Honda GX50	4 stroke; 48 cc; 2.0* gros Hp @ 7000 RPM	
Clutch Drive		
Fuel Tank Capacity	0.67 Qt. US	0.63 L
Oil Capacity	.14 Qt US	0.13 L

* Mass production engines may vary from this value.
Specifications subject to change without notice

5838 Cypihot
Saint Laurent, QC
Canada, H4S 1Y5

Phone 514.335.4337
Phone 877.937.9660
Fax 514.335.9633

mercedestextiles.com
sales@mercedestextiles.com



WICK® 100-4M


BID SPECIFICATION

- The portable fire pump must have a Honda model GX50, 4 stroke, 48cc engine
- The 4 stroke pump must be a all position capable of operating or being carried in any position.
- The pump must come standard with a centrifugal clutch
- The pump must have a detachable (bolt-on) foam-compatible single-stage pump end
- The pump must have an integral fuel tank that provides approximately 40 minutes run time
- The pump must be equipped with an electronic ignition
- The pump must not weigh more than 18 lbs / 8.2 Kg
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page
- The pump must meet the emission standards of US EPA/CARB regulations
- The pump must come standard with a transportable back pack style base
- The pump must be available with a base mounted hand primer and also available with a vertical mount discharge
- The single stage pump must be painted RED



WICK® 100-4M

Part#	Description
A	71WICK100-4HMB WICK100-4M All position Fire Pump c/w carrying base
B	71WICK100-4HMBV WICK100-4M All position Fire Pump c/w carrying base, vertical mount discharge
C	71WICK100-4HMBP WICK100-4M All position Fire Pump c/w carrying base, mounted hand primer

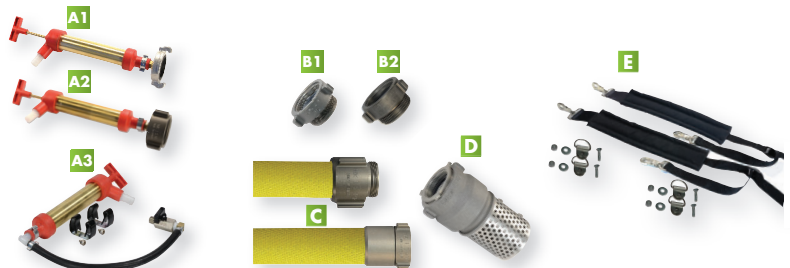

OPTIONAL

Part#	Description
A1	70FLHPPQC Hand Primer QC
A2	70FLHPPPS Hand Primer NPSH
A2	70FLHPPNH Hand Primer NH
A3	71W104-PRIMEKIT Hand Primer kit for WICK® 100-4H
B1	70FL15TPPS Thread protector 1 1/2" / 38mm
B2	6124NM24PF Adaptor .. 1 1/2" / 38mm NH Male x 1 1/2" / 38mm NPSH Female
C	70FL15DLPS10 Draflite HP suction hose .. 1 1/2" / 38mm x 10' / 3M c/w NPSH *
D	70FLFV15PF Foot Valve / Strainer (Alum) 1 1/2" / 38mm Female NPSH *
E	71W104-HMBPACK Backboard padded straps kit for Wick 100-4HM pump

* See website for complete listing of accessory and related products